



**Single  
Broadband  
VIS-NIR LED**

**Flexible light**

**Adjustable  
angle**

**Easy-to-mount**

**Uniform spectral  
emission**

**Suited for HSI  
machine vision**



# effiFLEX-HSI

## Hyperspectral VIS-NIR LED bar light

# PART NUMBER KEY

## STANDARD VERSION

EFFI-FLEX-HSI - <b>XXXX</b>	- <b>WW</b>	- <b>PP</b>
Optical Length (mm)	Window	Lens position
100	<b>TR</b> (Transparent)	<b>P0</b> (90°)
200	<b>SD</b> (Semi-diffuse)	<b>P1</b> (45°)
300	<b>OP</b> (Opaline)	<b>P2</b> (25°)
... All 100mm		<b>P3</b> (10°)
2900		

## AVAILABLE OPTIONS: REFERENCES

OPTICS	
Polarizer accessory	EFFI-FLEX-HSI-XXXX- <b>TR</b> -PP- <b>POL-NIR-90°</b> (Cf. page 5)
Linescan accessory	EFFI-FLEX-HSI-XXXX- <b>TR-P3-LS</b> (Cf. annexe line scan solutions page 14)
Cylindrical lens Version	EFFI-FLEX-HSI-XXXX- <b>TR-P1-LS-CYL</b> (Cf. annexe line scan solutions page 14)
Extended spectrum version (400-1000nm)	EFFI-FLEX-HSI- <b>X2</b> -XXXX- <b>910-970</b> -WW-PP- <b>ELS-UUU</b> (Cf. annexe page 12) <b>X2</b> : twice more LEDs. / <b>ELS</b> : AIC version only / <b>UUU</b> : adjustment range of the AIC (24V, 10V or 5V)
ELECTRONICS	
AIC Version (Analog Intensity Control)	EFFI-FLEX-HSI-XXXX-WW-PP- <b>ELS-VVV-UUU</b> <b>VVV</b> : Max LED current, standard at 350mA / <b>UUU</b> : adjustment range of the AIC (24V, 10V or 5V) <b>ELS-IN</b> Version: Inverse version (Intensity max @0V instead of 24V)
NPN trigger Version	EFFI-FLEX-HSI-XXXX-WW-PP- <b>NPN</b>
Kit with diffusers	EFFI-FLEX-HSI-XXXX- <b>KIT</b>
MECHANIC	
IP67 Version	Please refer to the <b>EFFI-Flex-CPT</b> documentation.
IP69K Version	Please refer to the <b>EFFI-Flex-IP69K</b> documentation.
Longer length	Up to 6 meters. Please contact Efflux.

# TECHNICAL SPECIFICATIONS

## effiFLEX-HSI

<b>Illumination Mode</b>	Strobe or Continuous
<b>Spectrum</b>	400-900nm (standard version) / 400-1000 nm (extended spectrum version) <i>Custom spectrum available upon request. Please contact Efflux.</i>
<b>Power Supply</b>	24V DC +/- 10%
<b>Power Consumption</b>	Depends on the size (Cf. page 6)
<b>Connector</b>	M12 - 5pins or M12 Power (T-Coded) - 4pins (depending on the power consumption)
<b>Driver version</b>	AutoStrobe (Analog Intensity Control (AIC) available in option)
<b>Response Time</b>	Rising: 15µs / Falling: 10µs
<b>Max duty cycle</b>	30 % in AutoStrobe mode
<b>Input signal</b>	PNP trigger input: Light ON: from 5V to 24V / Max. signal consumption: 1mA
<b>Weight</b>	Weight (in kg) = 0,1 + 0,3 x Optical length (in mm)
<b>Dimensions</b>	51mm x 49mm x (Length = Optical length + 35mm) (Cf. page xx)
<b>Material</b>	Device body: Aluminium wallow / Window: PMMA
<b>Fastener</b>	One T-slot on the back for 8mm T-nut (M6 recommended), and one slot on the side for M6 hex nut
<b>IP rating</b>	IP5X (IP67 and IP69K versions available)
<b>Working temperature</b>	0°C to 50°C
<b>Heating time</b>	Spectral stability is reached after an hour of operation at ambient temperature (25°C)
<b>Regulations</b>	CE - RoHS - REACH - WEEE - IEC 62471 - China RoHS
<b>Country of Origin</b>	France

# OPTICAL SPECIFICATONS - STANDARD VERSION

## MANY POSSIBLE CONFIGURATIONS IN JUST ONE LIGHT

### Diffusers

TR : Transparent

SD : Semi-diffuse

OP : Opaline




Change your configuration by hand.


Depending on the uniformity needed for the application, the user can easily change the diffuser to one that fulfills the application requirements.

### Lens position

The EFFI-Flex-HSI offers flexible lens positioning to control the beam angle. The user can adjust it by himself: the angle can be widened by moving the lens closer to the LEDs or narrowed by moving the lens further away from the LEDs.

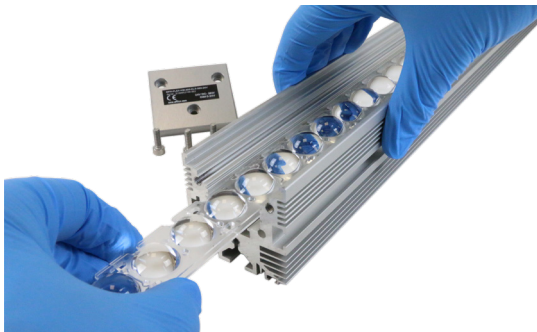


Change your configuration by hand.

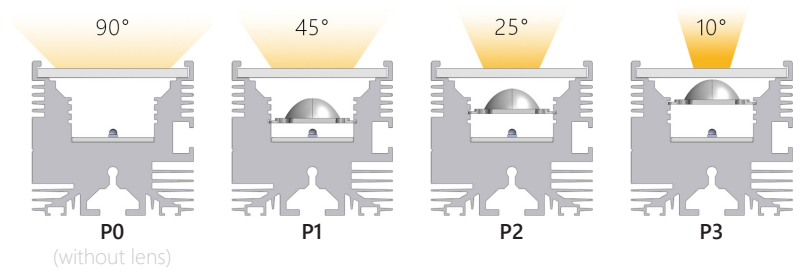

### Optical impact


Data for the EFFI-Flex-HSI with transparent window and different lens positions P0, P1, P2, P3.

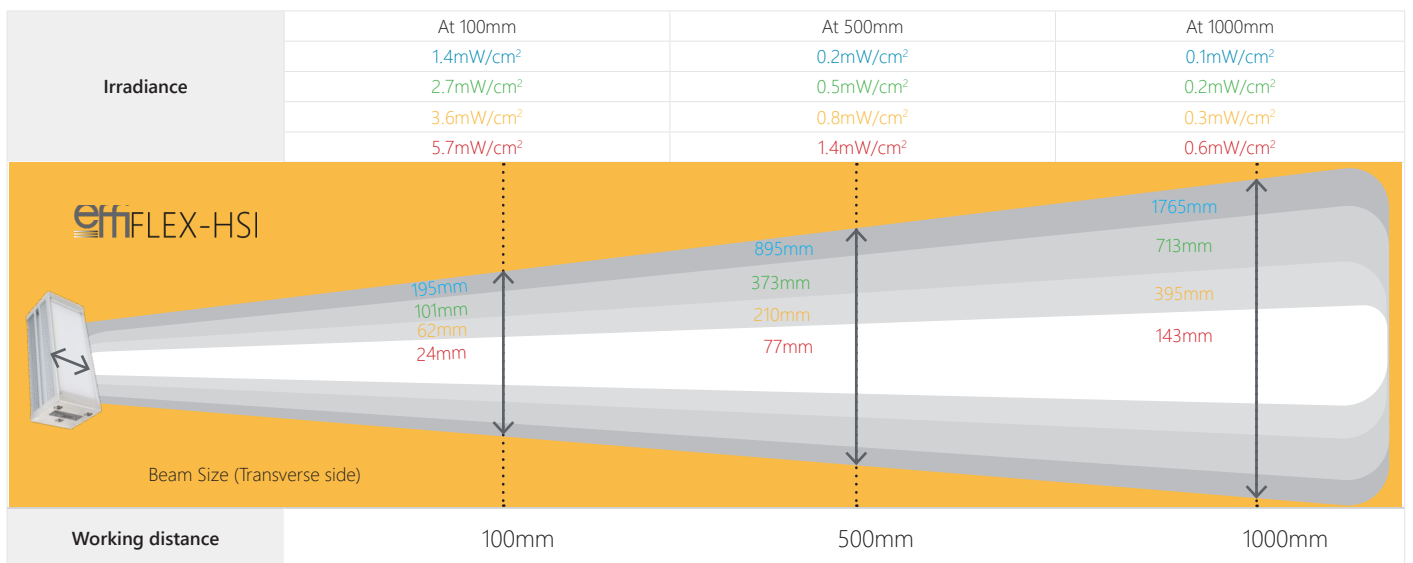

Optical power ratio for the different windows (In lens position P2 and at working = distance 400mm)		
Transparent window	Semi-diffuse window	Opaline window
100%	85%	15%

# SPECTRUM


## EFFI-Flex-HSI standard spectrum

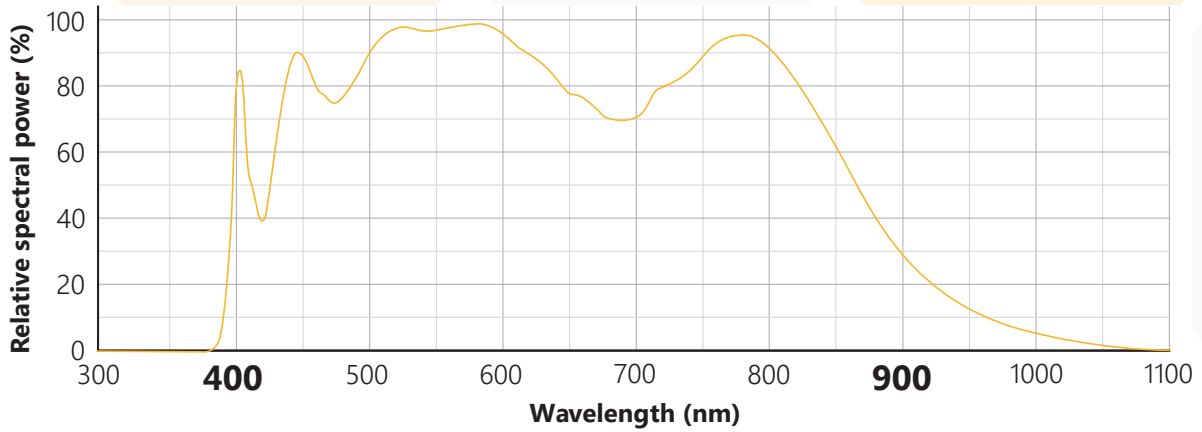

The EFFI-Flex-HSI requires time to stabilize his spectral emission. Please note that during this stabilization, the spectral power may decrease by maximum 15%.

At ambient temperature 25°C, in continuous mode this stability is reached an hour after switching on the product.

Evolution of the broadband spectrum during stabilisation time **effiFLEX-HSI**

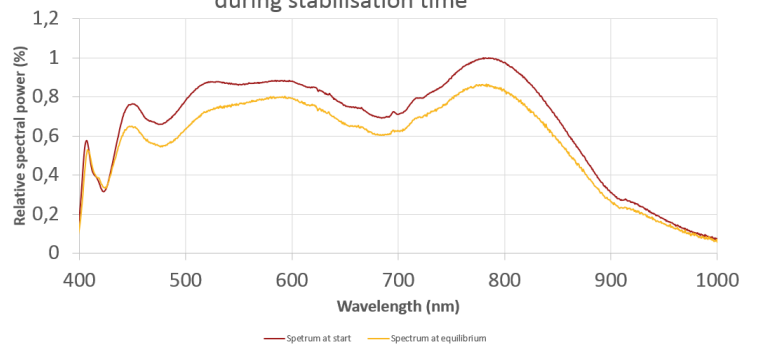


## OPTION: POLARIZER ACCESSORY

Using polarizers, on the Effilux light and on the camera, it is possible to eliminate glare from your workpiece making it easier to acquire a suitable image for the application.

The user can insert directly the polarizer inside the EFFI-Flex-HSI, under the window.



Without polarizer



With polarizer



### Important notes:


- With the EFFI-Flex-HSI, it is necessary to use a VIS-NIR polarizer (Ref : EFFE-FLEX-POL-XXX-NIR-90°).
- The polarization is optimal with a transparent window, the use of diffuser can depolarize the light.

# ELECTRONICAL SPECIFICATIONS - STANDARD VERSION


## WIRING LAYOUT - STANDARD VERSION

The EFFI-Flex-HSI requires 24V DC input power. Note the trigger pin needs to be connected either to the 24V DC signal for Continuous mode or to a PNP Trigger signal for AutoStrobe mode.


M12 - 5 pins  
male connector

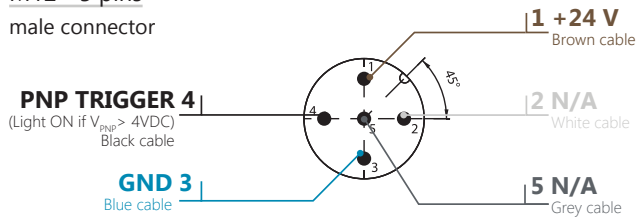

M12 Power (T-coded) - 4 pins  
male connector

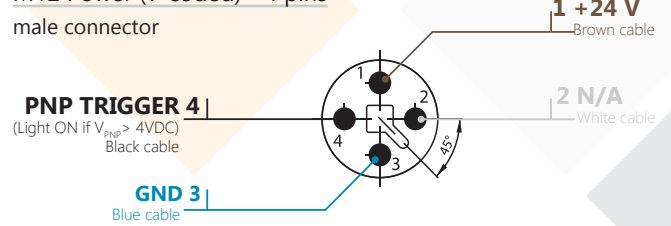

## AUTOSTROBE FEATURE

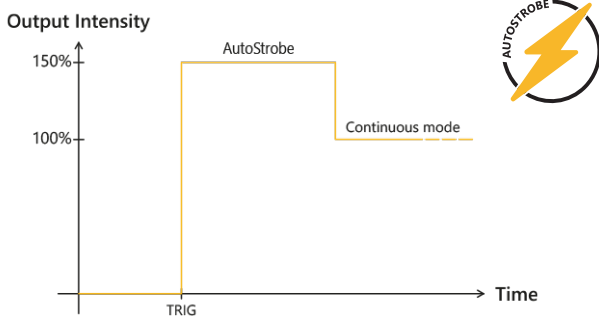



The integrated driver with AutoStrobe feature allows for 150% increased intensity while being strobed when compared to continuous mode. Strobing time lasts for 2 seconds.

Respect a duty cycle of 30% in strobe mode.

Response time	
Rising time	15 $\mu$ s
Falling time	10 $\mu$ s

## OPTION DRIVER ELS: AIC VERSION

The standard product (AutoStrobe) is not dimmable, EFFILUX offers an alternative electronic configuration suitable for continuous use and linear applications. This ELS driver version allows you to adjust the light intensity of the product according to the input signal: AIC Version (Analog Intensity Control).

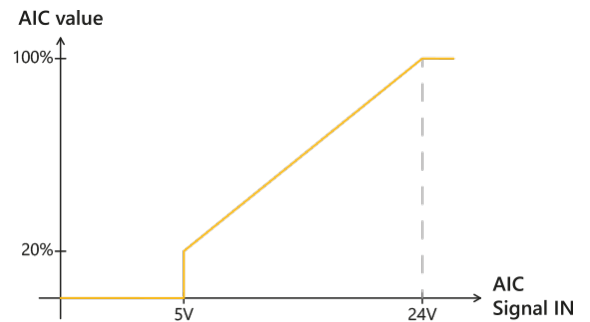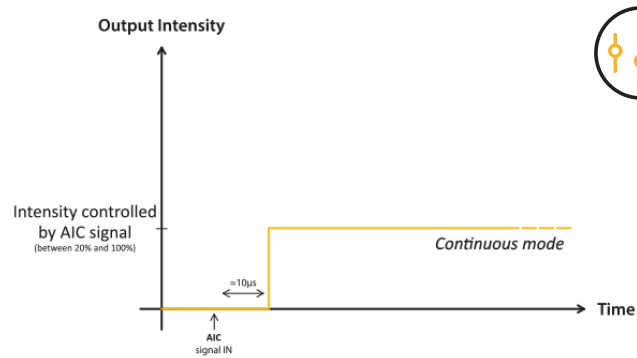

The wiring layout of the AIC version is similar to the standard wiring layout. The signal input (PNP trigger in the standard version) has to be replaced by the Analog Intensity Control signal in order to adjust the light intensity.

# ELECTRONICAL SPECIFICATIONS - STANDARD VERSION

## POWER CONSUMPTION AND CONNECTOR TYPE

Depending on power consumption, the EFFI-Flex-HSI has a standard M12 connector or an M12 Power connector. The exact power consumption of the product is always indicates on the product's stickers.

MAX POWER CONSUMPTION (STANDARD VERSION)																		
Optical Length XXXX (mm)		20	60	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	...
Standard AutoStrobe Version	$P_{peak}$	5W	5W	15W	20W	25W	35W	45W	55W	65W	70W	80W	90W	100W	105W	115W	125W	...
	$P_{cw}$	2W	5W	8W	15W	20W	30W	35W	45W	50W	55W	60W	65W	70W	75W	85W	90W	...
ELS350 Version		5W	5W	10W	15W	20W	30W	35W	40W	50W	55W	60W	70W	75W	80W	90W	95W	...

M12 5 pins	M12 Power 4 pins
---------------	---------------------


MAX POWER CONSUMPTION (STANDARD VERSION)																		
Optical Length XXXX (mm)		1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900		
Standard AutoStrobe Version	$P_{peak}$	135W	140W	150W	160W	170W	175W	185W	195W	205W	210W	220W	230W	240W	245W	255W		
	$P_{cw}$	95W	105W	110W	115W	120W	125W	135W	140W	145W	150W	160W	165W	170W	175W	180W		
ELS350 Version		95W	105W	110W	115W	120W	125W	135W	140W	145W	150W	160W	165W	170W	175W	180W		

$P_{peak}$  is corresponding to the peak consumption during the autostrobe and  $P_{cw}$  is corresponding to the power consumption during the continuous mode, after the AutoStrobe.


M12 5 pins	M12 Power 4 pins
---------------	---------------------

# MECHANICAL SPECIFICATIONS

## GENERAL DIMENSIONS

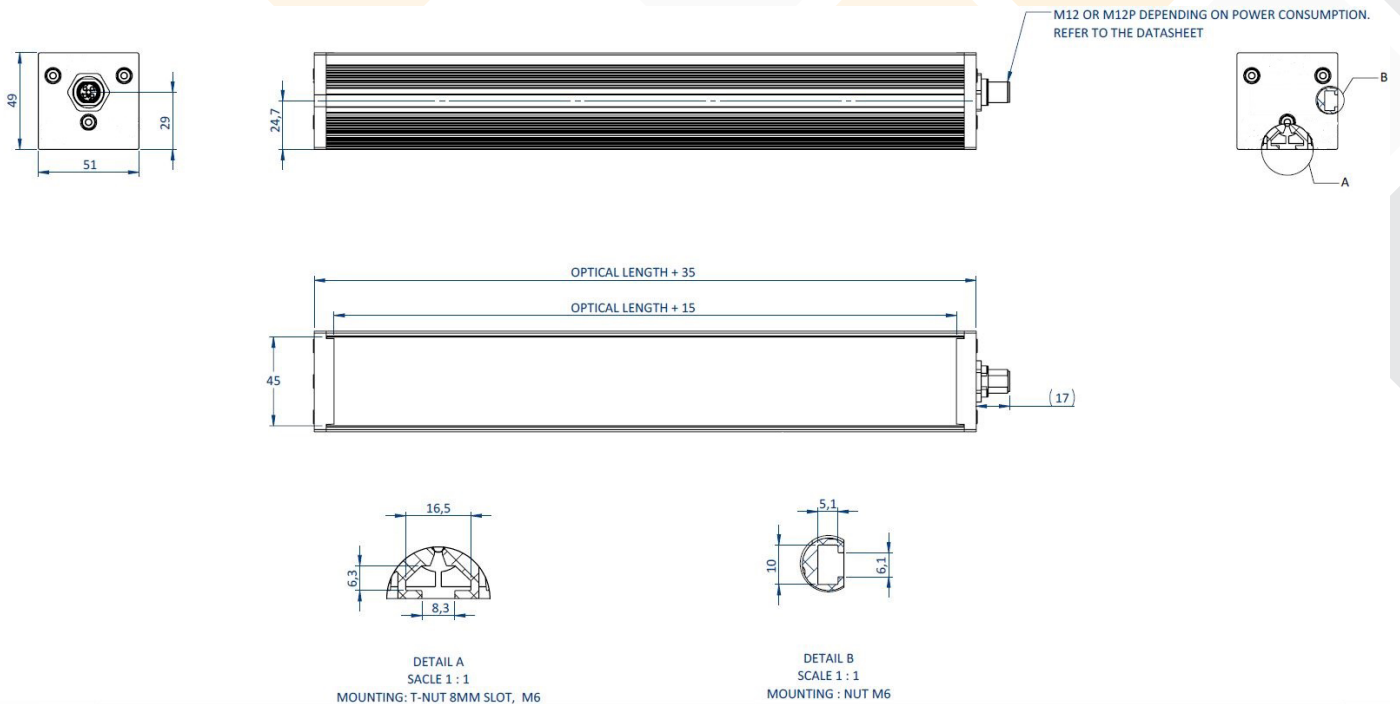

## MECHANICAL VERSIONS OF THE EFFI-FLEX-HSI

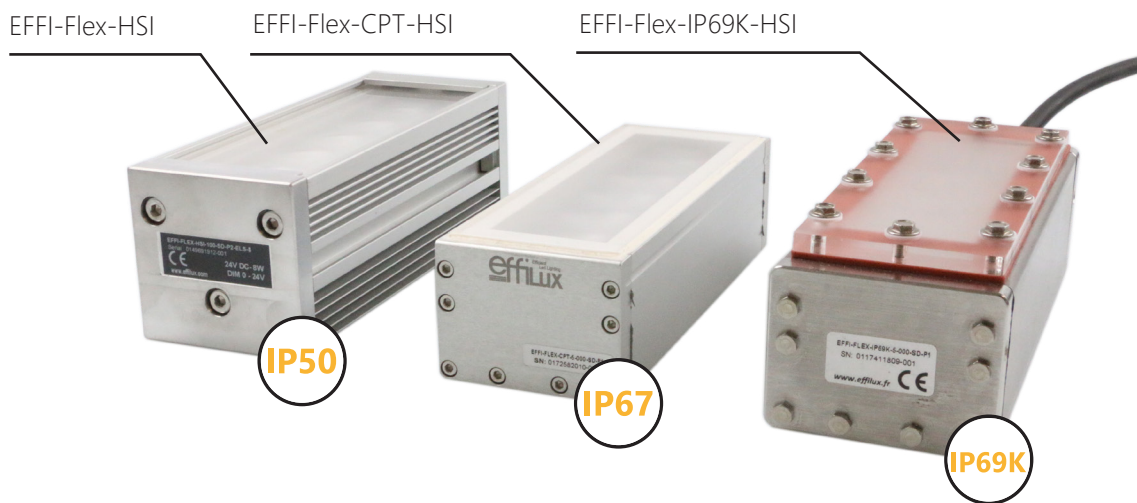


	IP rating	"Openable" product	Water cooling available	Anti-dust conception	Food version
EFFI-Flex-HSI	IP50	✓	✗	✗	✗
EFFI-Flex-CPT-HSI	IP67	✗	✓	✓	✗
EFFI-Flex-IP69K-HSI	IP69K	✗	✗	✓	✓


Please, refer to the dedicated documentation of the EFFI-Flex-CPT and the EFFI-Flex-IP69K.



## COLLECT MORE DATA WITH HYPERSPECTRAL IMAGING

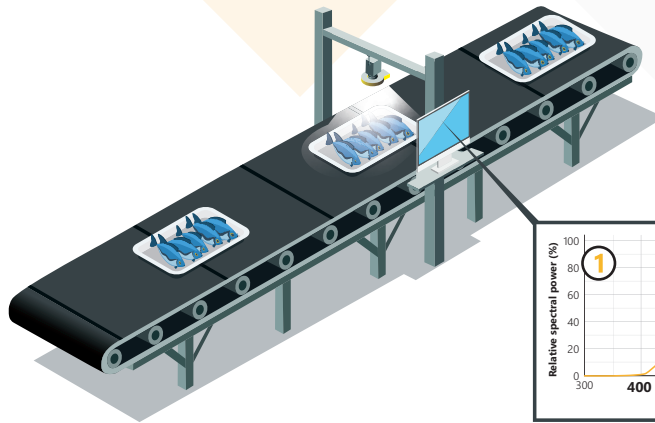

Hyperspectral imaging is an emerging technology in machine vision that integrates conventional imaging with spectroscopy. An enormous range of new applications for image processing in the visible-NIR region of the spectrum are now possible using this technique.

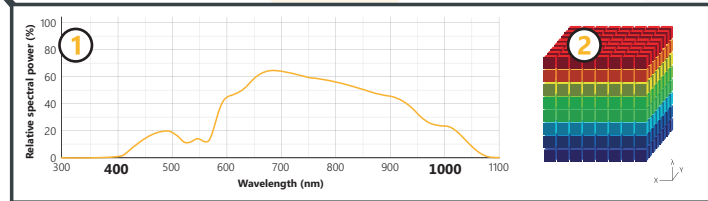


Here an example of an application using Effilux HSI lighting for optical control on fishes.

HSI lightings coupled with hyperspectral cameras allow to access both spectral and spatial information at the same time (2: hyperspectral data cube). In this case, spectral signature (1) can be access in a rapid and efficient way to ensure the good quality of products.

## HYPERSPECTRAL ILLUMINATION FOR A WIDE VARIETY OF DOMAINS

Some examples



Medical and pharmaceutical analysis



Waste sorting and recycling



Hyperspectral microscopy




Food sorting and quality analysis




Defect inspections

## SOLUTIONS FOR AREA SCAN AND LINE SCAN CAMERAS

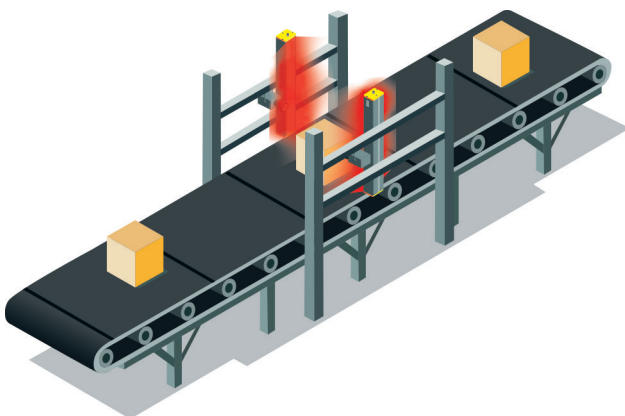

The EFFI-FLEX-HSI provides homogenous hyperspectral lighting, with various spot sizes for area scan camera applications.

The flexibility of the EFFI-FLEX-HSI makes it ideally suited for many fields of industrial applications (machine vision for quality control, pick and place, ...).

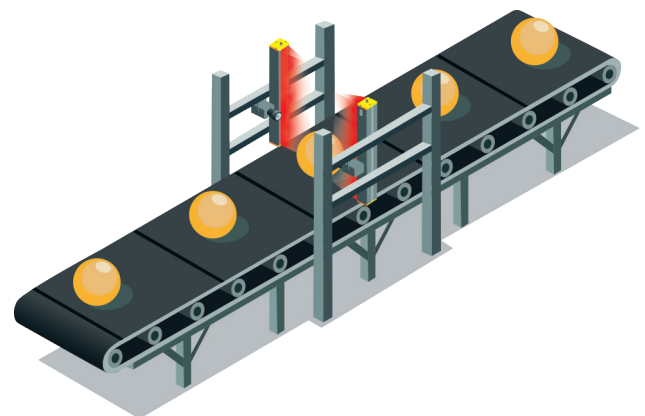

The EFFI-FLEX-HSI offers two solutions to obtain homogenous hyperspectral linear lighting. Those solutions have been design to perfectly fit line scan cameras needs in terms of illumination.

Equipped with the line scan optionvs, the EFFI-FLEX-HSI delivers ideal lighting to obtain high-resolution images of moving materials.

# ACCESSORIES

Please refer to the specific documentation for additional information on the accessories of the EFFI-Flex-HSI.



Diffusers

Transparent: EFFO-FLEX-TR-XXX\*  
Semi-diffuse: EFFO-FLEX-SD-XXX\*  
Opaline: EFFO-FLEX-OP-XXX\*



Polarizer / Linescan

Polarizer: EFFO-FLEX-POL-XXX\*-NIR-90°  
Linescan: EFFO-FLEX-LS-XXX\*



Extension Cables

2meters: EFFC-CAB-M12-FM-5-DD-L2  
5meters: EFFC-CAB-M12-FM-5-DD-L5  
10meters: EFFC-CAB-M12-FM-5-DD-L10



Fasteners

T-Nut Kit: EFFV-BOLT-0011  
Pivot joint Kit: EFFM-1-002



Power supplies

Power supply: EFFI-PWR- ...  
Compact power supply:  
EFFI-SPWR-090W-24V-102-YY\*

\*XXX = number of LEDs (Optical length (mm) / 20)  
YY = type of outlet: UK, CH, EU, US

# CUSTOMIZATIONS



# REGULATIONS

In accordance with machinery directive, the CE and UKCA marks indicate that the product complies with the relevant EU and UK legislation.

Please refer to the "General warnings & precautions for use" for detailed information regarding standards and regulations.



# CONTACT INFORMATION

Please refer to the specific documentation (datasheet, user manual, drawing and general warnings & precautions for use) for complementary information.

Contents of this document are based on information available as of June-2021 and may be changed without prior notice.




EFFILUX  
1, Rue de Terre Neuve  
Mini Parc du Verger - Bâtiment E  
91940 Les Ulis - FRANCE

Tel: +33 9 72 38 17 80  
Fax: +33 9 72 11 21 69  
Mail: sales@effilux.fr

Copyright 2022 Effilux - All rights Reserved

# ANNEX - EXTENDED SPECTRUM VERSION - X2 VIS-NIR

## THE FLEXIBILITY OF THE EFFI-FLEX WITH AN EXTENDED SPECTRUM

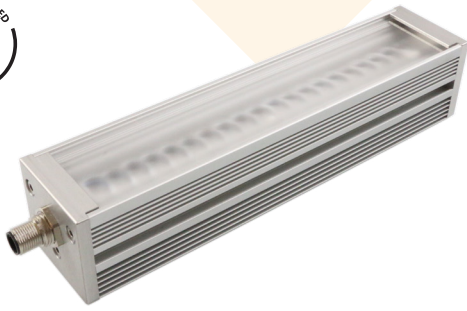

The **X2 VIS-NIR version** of the EFFI-Flex-HSI integrates two additional **NIR LEDs** (910nm and 970nm) offering an **extended spectrum** from 400 to 1000nm.


This version allows for independent control of each channel (Broadband White, 910nm and 970nm) in order to adapt the spectrum to your needs and to your camera sensitivity.

EFFI-FLEX-HSI	- X2	- XXXX	- 910-970	- WW	- PP	- ELS-UUU
	Doubled LED density	Optical Length (mm)	Additional IR LEDs	Window	Lens position	Range of the AIC:
		200		TR (Transparent)	P0 (90°)	ELS-24V
		300		SD (Semi-diffuse)	P1 (45°)	ELS-10V
		400		OP (Opaline)	P2 (25°)	ELS-5V
		... All 100mm			P3 (10°)	
		1000				

## STANDARD VERSION AND EXTENDED SPECTRUM VERSION COMPARISON

	Spectrum	Number of LEDs	AIC Version	AutoStrobe feature	Illuminance at XXm of working distance
EFFI-Flex-HSI	400-900 nm	5 LEDs per 100mm	✓	✓	XX meters
EFFI-Flex-HSI-X2 VIS-NIR	Extended spectrum 400-1000 nm	10 LEDs per 100mm	✓	✗	XX meters

## SPECTRUM

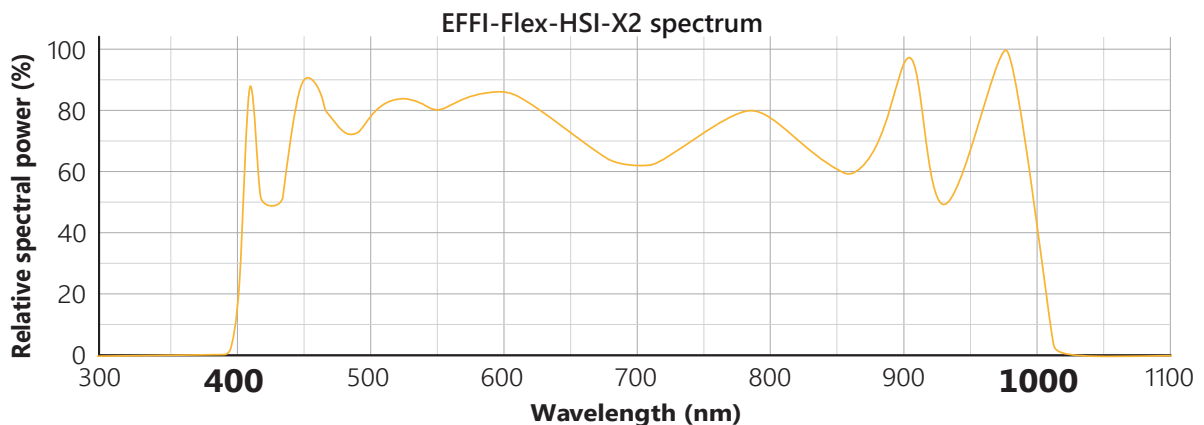


**Note:** This spectrum has been measured with adjusted NIR LEDs intensities in order to get a flat spectrum. If all channels are set to 100% intensity, the peaks at 910nm and 970nm are higher, helping to compensate for the camera's lack of sensitivity in the NIR range.

# ANNEX - EXTENDED SPECTRUM VERSION - X2 VIS-NIR

The EFFI-Flex-HSI requires time to stabilize his spectral emission. Please note that during this stabilization, the spectral power may decrease by maximum 10%.

At ambient temperature 25°C, this stability is reached 35 minutes after switching on the product.

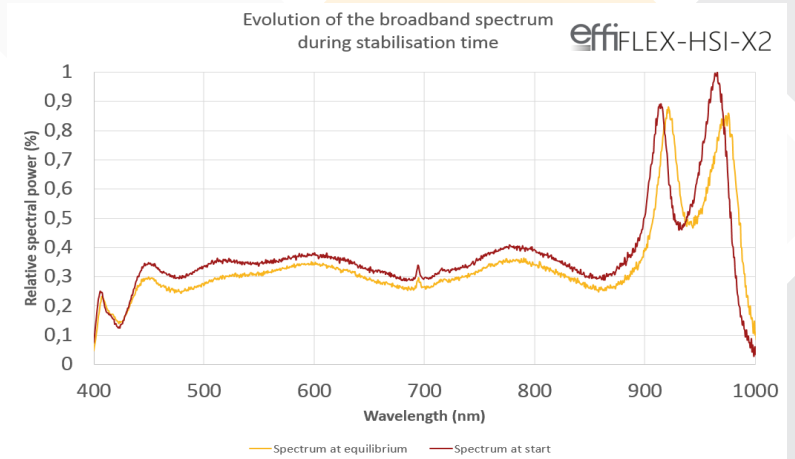


## ELECTRONICAL SPECIFICATION - X2 VIS-NIR VERSION

### Wiring Layout

The EFFI-Flex-HSI-X2 VIS-NIR requires 24V DC input power and is only compatible with the Analog Intensity Control version (AIC).

For specifications about the AIC version, please refer to the standard version (Cf. page 6).

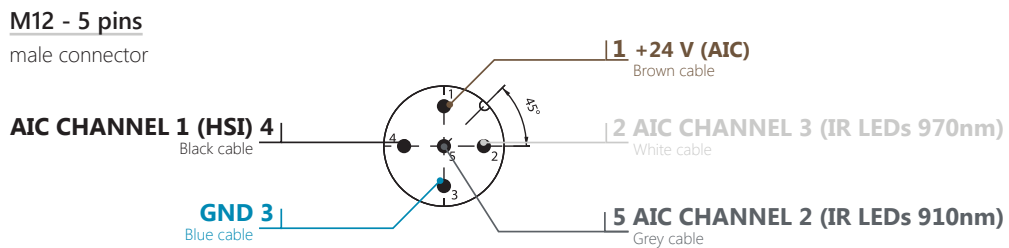

### Power consumption and Connector type

The EFFI-Flex-HSI-X2 VIS-NIR has a standard M12 connector (5 pins). The exact power consumption of the product is always indicates on the product's stickers.

MAX POWER CONSUMPTION (X2 VERSION)									
Optical Length XXXX (mm)	200	300	400	500	600	700	800	900	For other optical length, please contact Efflux.
Channel 1 (HSI)	15W	25W	30W	35W	45W	50W	55W	60W	
Channel 2 (IR 910)	5W	5W	5W	5W	5W	5W	5W	5W	
Channel 3 (IR 970)	5W	5W	5W	5W	5W	5W	5W	5W	


**M12**  
**5 pins**

# ANNEX - LINE SCAN SOLUTIONS

## HYPERSPECTRAL LINEAR LIGHTING

EFFILUX line scan options provide high uniformity linear lighting. Those options can be used in conjunction with line scan camera for short and long range line scan inspection applications.

Both standard and X2 version of the EFFI-Flex-HSI benefit from the two linescan options.

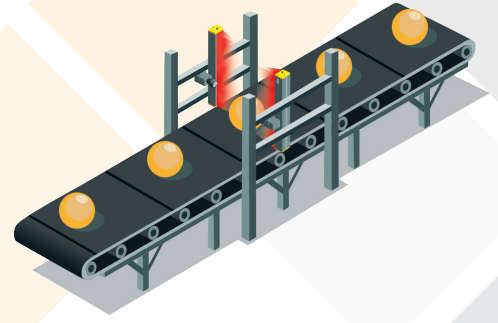

## OPTION: LINESCAN ACCESSORY

With the lens in the upper position, the linescan accessory transforms the EFFI-Flex-HSI light into a uniform line light ideal for either brightfield or darkfield illumination.

The linescan accessory can be insert inside the EFFI-Flex-HSI by the user just under the window.

Additionally to the linescan accessory, the cylindrical lens is a specific optical system that will focus the light into a very bright line.

The cylindrical lens version of the EFFI-Flex-HSI is a specific product.




## Optical impact



Without linescan or cylindrical lens



With linescan



With cylindrical lens