



THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE PROPERTY OF EFFILUX AND CONFIDENTIAL. THEY SHALL NOT BE REPRODUCED NOR DISCLOSED TO ANY PERSON EXCEPT TO THOSE HAVING A NEED TO KNOW THEM WITHOUT PRIOR WRITTEN CONSENT OF EFFILUX

CE DOCUMENT ET LES INFORMATIONS QU'IL CONTIENT SONT CONFIDENTIELS ET SONT LA PROPRIÉTÉ EXCLUSIVE DE EFFILUX. ILS NE DOIVENT ÊTRE COMMUNIQUÉS QU'ÀUX PERSONNES AYANT A EN CONNAÎTRE ET NE PEUVENT ÊTRE REPRODUITS NI DIVULGUÉS À TOUTE AUTRE PERSONNE SANS AUTORISATION PRÉALABLE ÉCRITE PAR EFFILUX


XX = CM

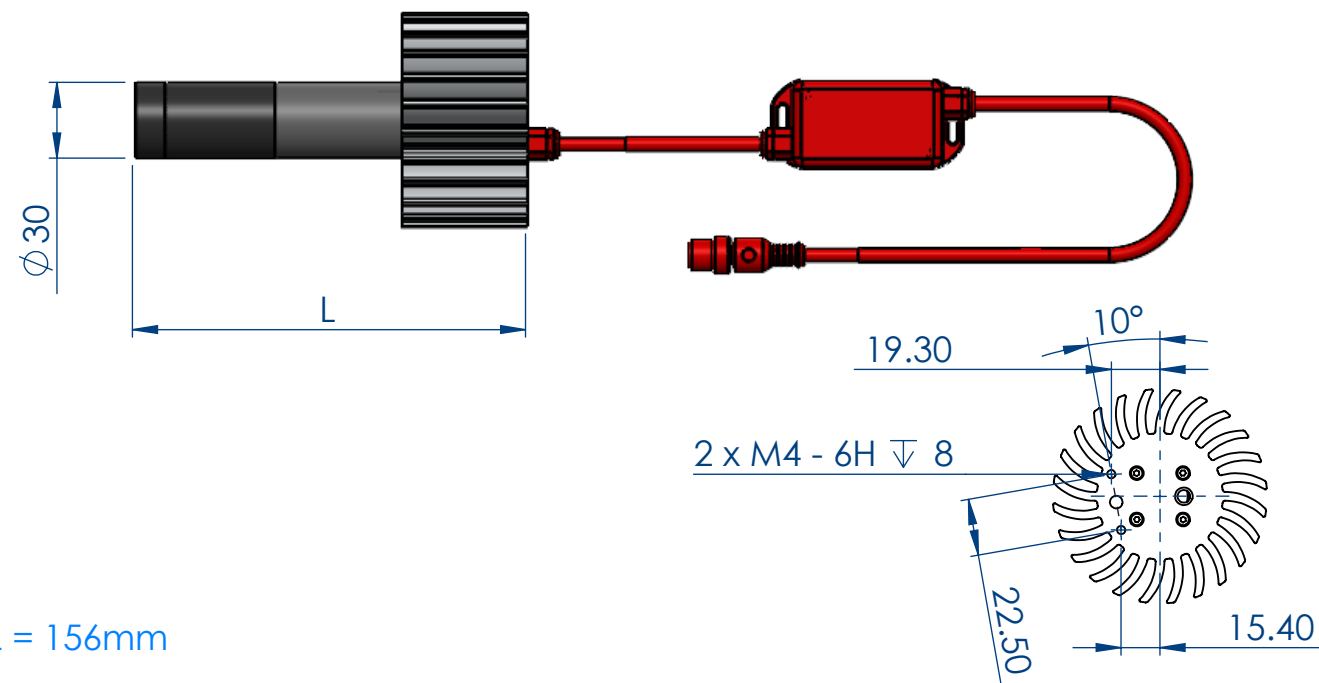


XX = MF

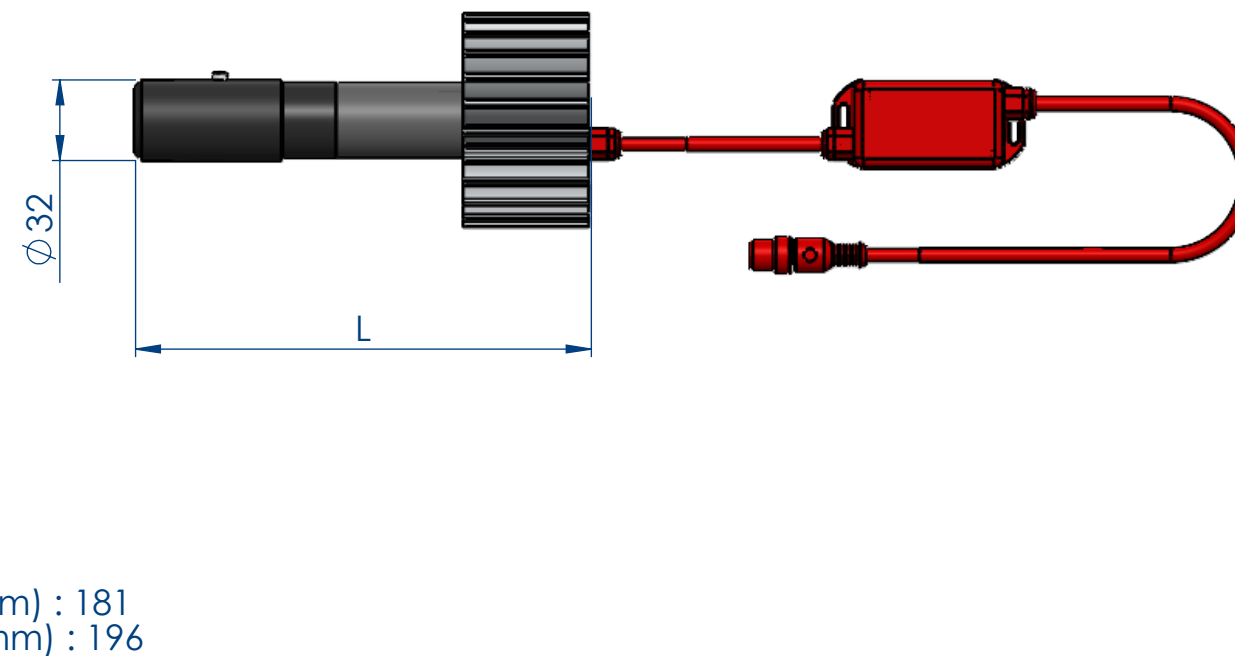

XX = FF


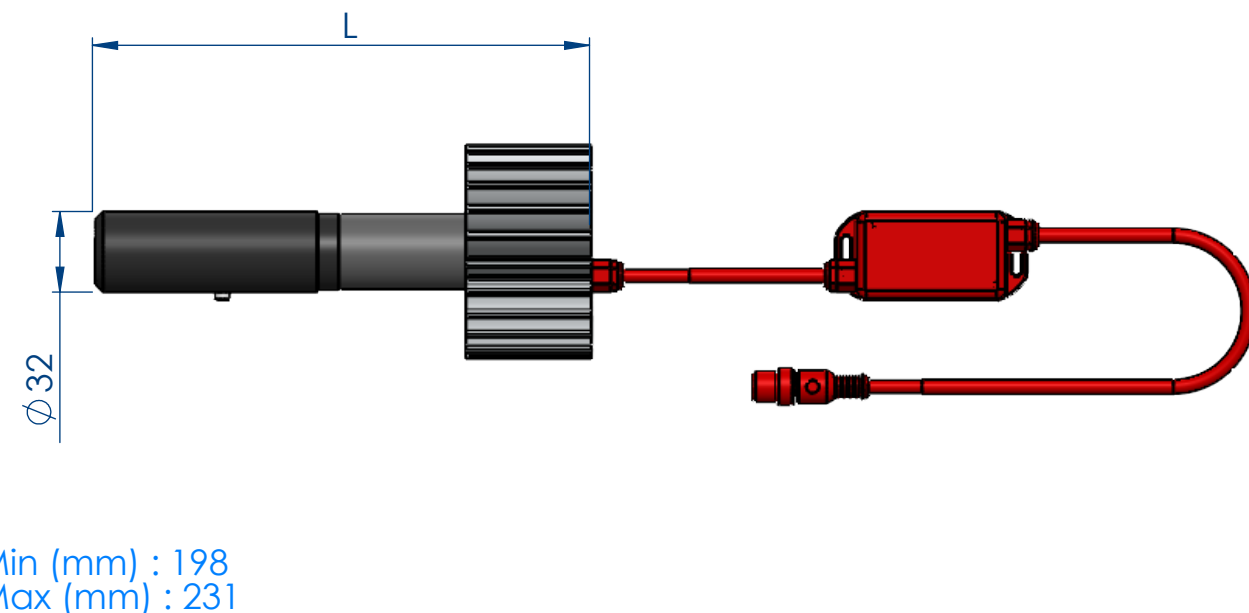


XX = NF

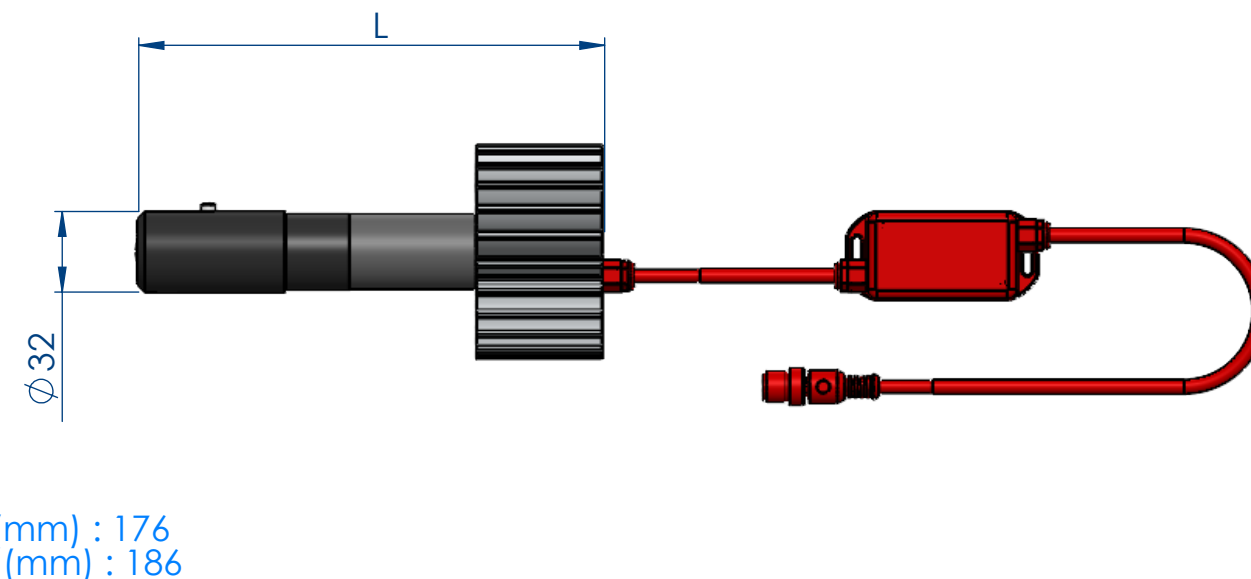

Red components correspond to the M12 configuration (with LED driver). For the M8 configuration (without LED driver) don't take this into account

DES/ DRA.	P.GARIN	17/06/2024
APPROVED		17/06/2024

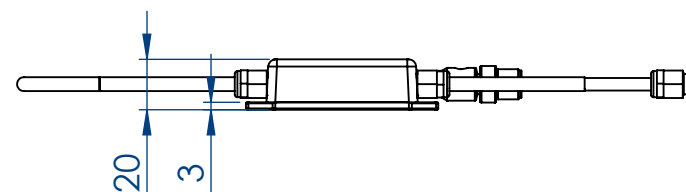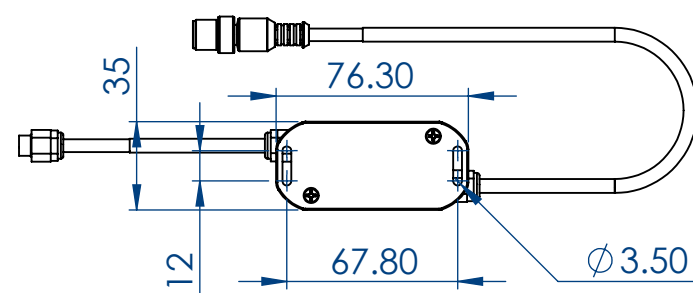

Reference EFFI-SHARP-PWR-FL-XX-ZZZ-M			IP 5X	1 Rue de Terre Neuve Mini Parc du Verger Bâtiment E 91940 Les Ulis, France	
Designation EFFI SHARP POWER FOCUS LIGHT				Mail: sales@effilux.fr Tel : +33 9 72 52 70 03 www.effilux.com	
Rev /			Unit : mm	General Tolerances	
Scale 1:3	Size A3	Page 1/1		X ≤ 300TOL ±0,2 300 < X < 800TOL ±0,5 X ≥ 800TOL ± 1	
					