
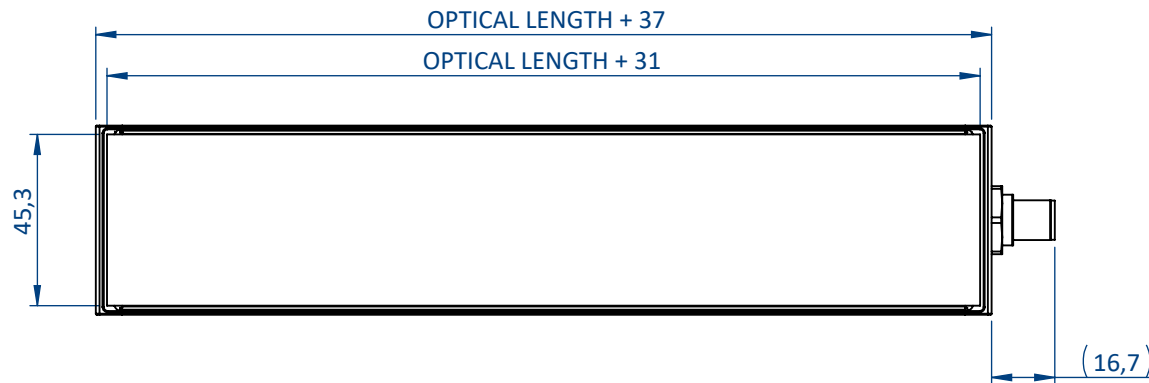




THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE PROPERTY OF EFFILUX AND CONFIDENTIAL. THEY SHALL NOT BE REPRODUCED NOR DISCLOSED TO ANY PERSON EXCEPT TO THOSE HAVING A NEED TO KNOW THEM WITHOUT PRIOR WRITTEN CONSENT OF EFFILUX

CE DOCUMENT ET LES INFORMATIONS QU'IL CONTIENT SONT CONFIDENTIELS ET SONT LA PROPRIETE EXCLUSIVE DE EFFILUX. ILS NE DOIVENT ETRE COMMUNIQUEES QU'AUX PERSONNES AYANT A EN CONNAITRE ET NE PEUVENT ETRE REPRODUITS NI DIVULGUES A TOUTE AUTRE PERSONNE SANS AUTORISATION PREALABLE ECRITE PAR EFFILUX


OPTICAL LENGTH	PRODUCT LENGTH	WEIGHT (KG)
100	137	0,3
200	237	0,5
300	337	0,7
400	437	0,9
500	537	1,1
...	...	...
2800	2837	6,0
2900	2937	6,2



M12 OR M12P DEPENDING ON POWER CONSUMPTION.
REFER TO THE DATASHEET



DETAIL A
SCALE 2 : 1
MOUNTING: T-NUT 6MM SLOT, M4

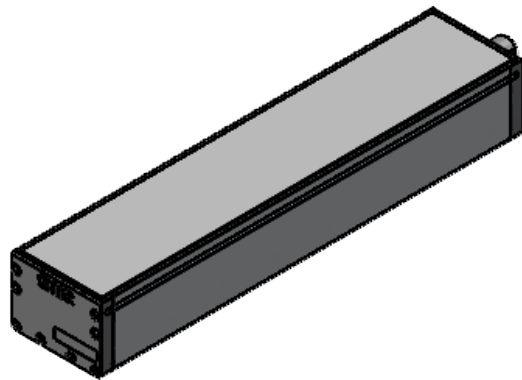

PLEASE REFER TO THE SPECIFIC DOCUMENTATION FOR WIRING LAYOUT

Reference			IP	1 Rue de Terre Neuve Mini Parc du Verger Bâtiment E 91940 Les Ulis, France	
STANDARD EFFI-FLEX-BL-CPT			67		
Designation				Mail: sales@effilux.fr Tel : +33 9 72 52 70 03 www.effilux.com	
EFFI-FLEX-BL-CPT-XXX-ZZZ					
Revision /		Date 28/07/2020		Unit : mm	General Tolerances
Scale 1:2	Size A3	Page 2/2		ISO 2768 - fH-E	