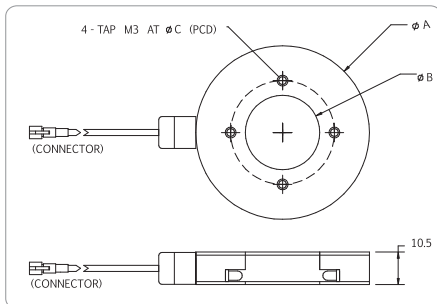
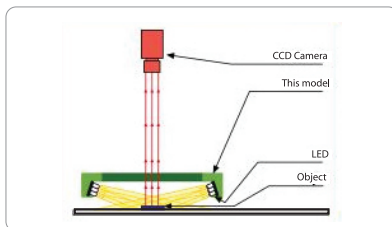


LLA SERIES - Low Angle Illumination

LED are arrange in led angle to provide side illumination. LLA series are available in 1 row to suite different brightness requirements.

Application: edge detection, scratched on metal or glossy surface.

**Technical Specification:**

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions [MM]			Color	Voltage / Watt	Current
	ØA	ØB	ØC			
LLA-90-050-1-X	56	24	33,5	● ● ● ●	24V / 1.08W	45mA
LLA-90-080-1-X	80	50	56,5	● ● ● ●	24V / 1.44W	60mA
LLA-90-100-1-X	101	71	77,5	● ● ● ●	24V / 1.80W	75mA
LLA-90-150-1-X	151	121	127,5	● ● ● ●	24V / 2.52W	105mA
LLA-90-180-1-X	181	151	157,5	● ● ● ●	24V / 3.24W	135mA
LLA-90-210-1-X	211	181	187	● ● ● ●	24V / 3.96W	165mA
				● ● ● ●	24V / 5.04W	210mA
				● ● ● ●	24V / 4.68W	195mA
				● ● ● ●	24V / 6.12W	255mA
				● ● ● ●	24V / 5.76W	240mA
				● ● ● ●	24V / 7.20W	300mA

Remark: 2 types of white are available- W: Cool White WW: Yellowish White