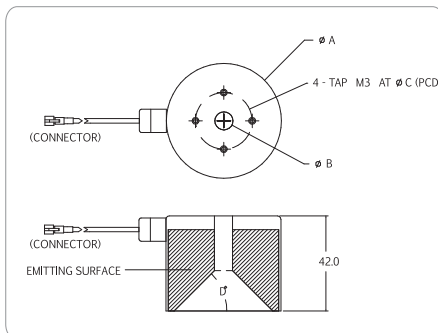
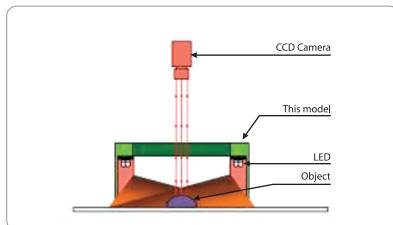


## DLR2 SERIES - Diffused Angular Illumination

DLR2 series provide diffused even illumination over a surface. The even illumination prevents glaring for shining surface.

Application: character recognition on shining surface, lead inspection.

**Technical Specification:**

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

**Customize Lighting:**

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

| Model           | Dimensions [MM] |          |          |           | Color   | Voltage / Watt | Current |
|-----------------|-----------------|----------|----------|-----------|---------|----------------|---------|
|                 | $\phi A$        | $\phi B$ | $\phi C$ | $D^\circ$ |         |                |         |
| DLR2-45-050-2-X | 50.8            | 8        | 25       | 45        | ● ● ● ○ | 24V / 1.44W    | 60mA    |
| DLR2-45-070-2-X | 76.2            | 21       | 52       | 45        | ● ● ● ○ | 24V / 1.80W    | 75mA    |
| DLR2-45-100-2-X | 100             | 45       | 80       | 45        | ● ● ● ○ | 24V / 2.88W    | 120mA   |
| DLR2-45-120-2-X | 126.5           | 71       | 106      | 45        | ● ● ● ○ | 24V / 3.60W    | 150mA   |
| DLR2-60-050-2-X | 50.8            | 18       | 25       | 60        | ● ● ● ○ | 24V / 3.60W    | 150mA   |
| DLR2-60-070-2-X | 76.2            | 43       | 52       | 60        | ● ● ● ○ | 24V / 4.68W    | 195mA   |
| DLR2-60-100-2-X | 100             | 68       | 80       | 60        | ● ● ● ○ | 24V / 4.68W    | 195mA   |
| DLR2-60-120-2-X | 126.5           | 93       | 106      | 60        | ● ● ● ○ | 24V / 6.12W    | 255mA   |

Remark: DLR part numbers are changed to DLR2.