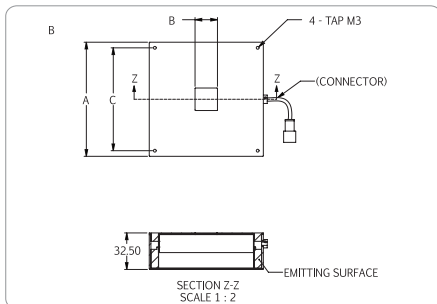
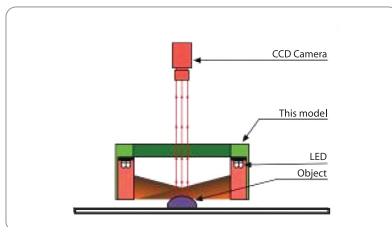
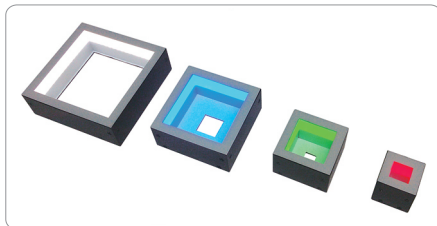


DLQ2 & DLF2 SERIES - Diffused Square Illumination

DLQ2 & DLF2 series provide diffused even illumination over from sides. The even illumination is suitable for inspection of rectangular work-piece.

Application: BGA ball inspection and QFP lead inspection.

**Technical Specification:**

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult: Technical Sales for More Information

Model	Dimensions [MM]			Color	Voltage / Watt	Current
	A	B	C			
DLQ2-90-030-1-X	31.8	10	21	● ● ● ●	24V / 1.44W	60mA
DLQ2-90-050-1-X	50.8	10	40	● ● ● ●	24V / 1.44W	60mA
DLQ2-90-070-1-X	76.2	20	66	● ● ● ●	24V / 2.88W	120mA
DLQ2-90-100-1-X	101.6	20	91.5	● ● ● ●	24V / 2.88W	120mA
DLQ2-90-100-1-X	101.6	20	91.5	● ● ● ●	24V / 4.32W	180mA
DLQ2-90-100-1-X	101.6	20	91.5	● ● ● ●	24V / 5.76W	240mA
DLF2-90-050-1-X	50.8	26	40	● ● ● ●	24V / 2.88W	120mA
DLF2-90-070-1-X	76.2	55	66	● ● ● ●	24V / 2.88W	120mA
DLF2-90-100-1-X	101.6	80	91.5	● ● ● ●	24V / 4.32W	180mA
DLF2-90-100-1-X	101.6	80	91.5	● ● ● ●	24V / 5.76W	240mA

Remark: The current of DLF2 & DLQ2 are changed.