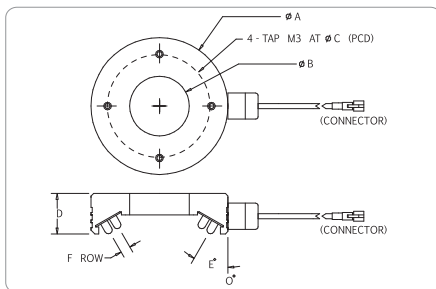
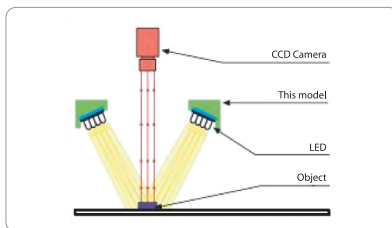


LSW SERIES - High Density, Concentrated Light Output

LED arrays are arranged such that the light arrays are concentrated to a spot for extreme bright light. Using flexible PCB board, the product quality and efficiency improves. Flexible boards are able to achieve optimized angle with variation of outer and inner diameter to target a work piece.

Application: substrate inspection, label inspection, flat surface, fiducial recognition.

**Technical Specification:**

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult: Technical Sales for More Information

Model	Dimensions (MM)						Color	Voltage / Watt	Current
	ØA	ØB	ØC	D	E*	F (ROW)			
LSW-00-040-2-X	43	15	28	20	0	2	● ● ○	24V / 1,44W	60mA
LSW-00-050-2-X	54	23.5	41	20	0	2	● ● ○	24V / 1,80W	75mA
LSW-00-070-3-X	70	26	56	20	0	3	● ● ○	24V / 2,16W	90mA
LSW-00-090-4-X	92	40	70	20	0	4	● ● ○	24V / 2,88W	120mA
LSW-15-050-2-X	50	28	40	16	15	2	● ● ○	24V / 4,32W	180mA
LSW-15-070-3-X	70	32	56	20.5	15	3	● ● ○	24V / 5,40W	225mA
LSW-15-090-4-X	92	47	70	20.5	15	4	● ● ○	24V / 8,28W	345mA
LSW-15-100-5-X	103	48	80	22	15	5	● ● ○	24V / 8,28W	345mA
LSW-30-040-2-X	46	20	35	16	30	2	● ● ○	24V / 2,16W	90mA
LSW-30-050-2-X	54	23.5	41	18	30	2	● ● ○	24V / 2,52W	105mA
LSW-30-070-3-X	70	32	56	20	30	3	● ● ○	24V / 2,88W	120mA
LSW-30-090-4-X	92	48	70	22	30	4	● ● ○	24V / 4,32W	180mA
LSW-45-050-2-X	54	25	44	20	45	2	● ● ○	24V / 5,40W	225mA
LSW-45-070-3-X	70	35	60	21	45	3	● ● ○	24V / 8,28W	345mA
LSW-45-090-4-X	92	52	70	24	45	4	● ● ○	24V / 10,44W	435mA
LSW-45-100-5-X	100	48	80	30	45	5	● ● ○	24V / 11,16W	465mA
							● ● ○	24V / 14,40W	600mA

Remark: 2 types of white are available- W: Cool White WW: Yellowish White