




ILLUMINATOR DATA-ID

HPD2-00-130-1-G-24V

Lighting Dimension

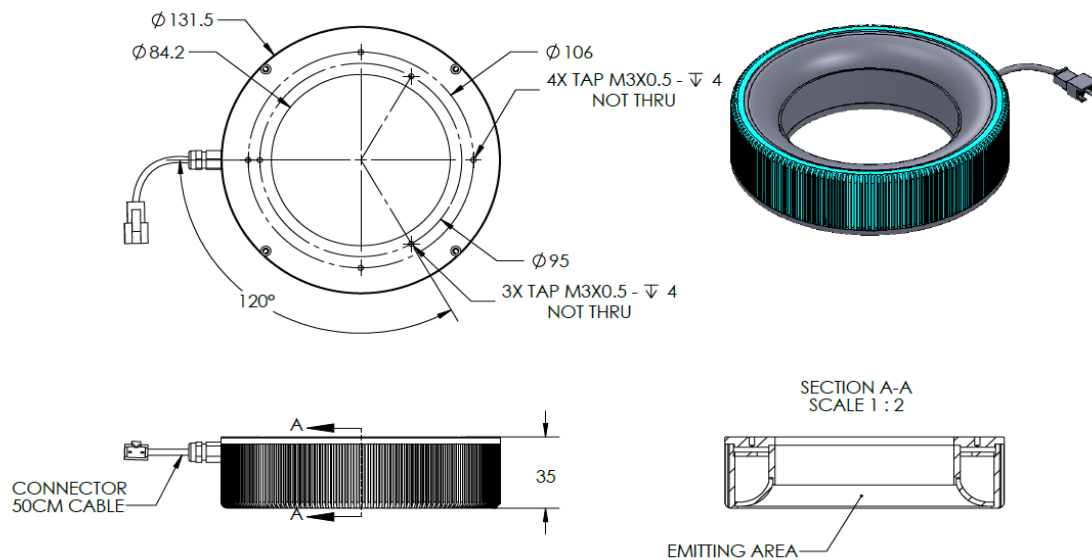


| Mechanical Information | |
|---------------------------|------------------------------|
| Casing Material | Aluminium |
| Storage Temperature Range | Temp 0-45°C, Humidity 20-85% |
| Weight | 275 g |
| Length / Outer Diameter | 131.5 mm |
| Width / Inner Diameter | 84.2 mm |
| Thickness / Height | 35 mm |



ILLUMINATOR DATA-ID

HPD2-00-130-1-G-24V

| | | | | |
|---|--------|--|--------|-------------|
| Optical Information | | | | |
| Part Number | | HPD2-00-130-1-G-24V | | |
| LED Color | | GREEN | | |
| Wavelength | (nm) | 525 | | |
| Intensity (±15%) | (Lux) | 13149 | 11161 | 3550 |
| Working Distance | (mm) | 26 | 62 | 157 |
| Illumination (number of row) | | 1 | | |
| Illumination Active Area | | | | |
| Active Length / Outer Diameter | (mm) | 119.5 | | |
| Active Width / Inner Diameter | (mm) | 86.2 | | |
| Emission angle | (deg.) | 0-90 | | |
| Eye Safety Class (IEC62471) | | EXEMPT | | |
| | | | | |
| Electrical Information | | | | |
| Lighting Supply Voltage (constant voltage mode) | | 24V ± 2% | | |
| Continuous Current | (mA) | 360 | | |
| Power Consumption | (W) | 8.64 | | |
| Lighting casing temperature, Operating after 60 minutes | °C | 53 | | |
| | | | | |
| Strobe Mode Specification | | | | |
| Pulse Operation | | YES | | |
| Max. Lighting Supply Voltage (Constant voltage power supply) | (V) | Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle, Recommended at 36VDC | | |
| Pulse Current, (Max. 10msec) (Constant current power supply) | (mA) | 1080 | | |
| Max. Trigger Pulse Duration | (msec) | 10 | | |
| Duty Cycle | | 0-10% | | |
| | | | | |
| Additional Information | | | | |
| Additional Cooling Method | | Attached to machine part for better heat dissipation | | |
| Intensity Controller Selection | | ANG, ST, SD and SDA Series | | |
| CE Conformity | | YES | | |
| RoHS Compliance | | YES | | |
| | | | | |
| Connection | | | | |
| Connector Type (Default): | | JST SMR-03V | | |
| Cable Length out from lighting : | (mm) | 500 | | |
| Pin Configuration : | | Pin | Signal | Cable Color |
| | | 1 | LED + | RED |
| | | 2 | N.C. | --- |
| | | 3 | LED - | WHITE |
| | |  | | |
| | | | | |
| Application | | | | |
| Illumination Type | | Indirect Illumination | | |
| Appication Use | | Shining surface and food packaging | | |



ILLUMINATOR DATA-ID

HPD2-00-130-1-G-24V

Uniform Graph (Relative Irradiation Strength) - Representative pattern

| WD | Tolerance | Diameter |
|------|-----------|----------|
| 62mm | 10% | 23mm |
| 62mm | 20% | 43mm |
| 62mm | 30% | 57mm |

