




# ILLUMINATOR DATA

## HPDP-00-110-1-B-24V


### Lighting Dimension

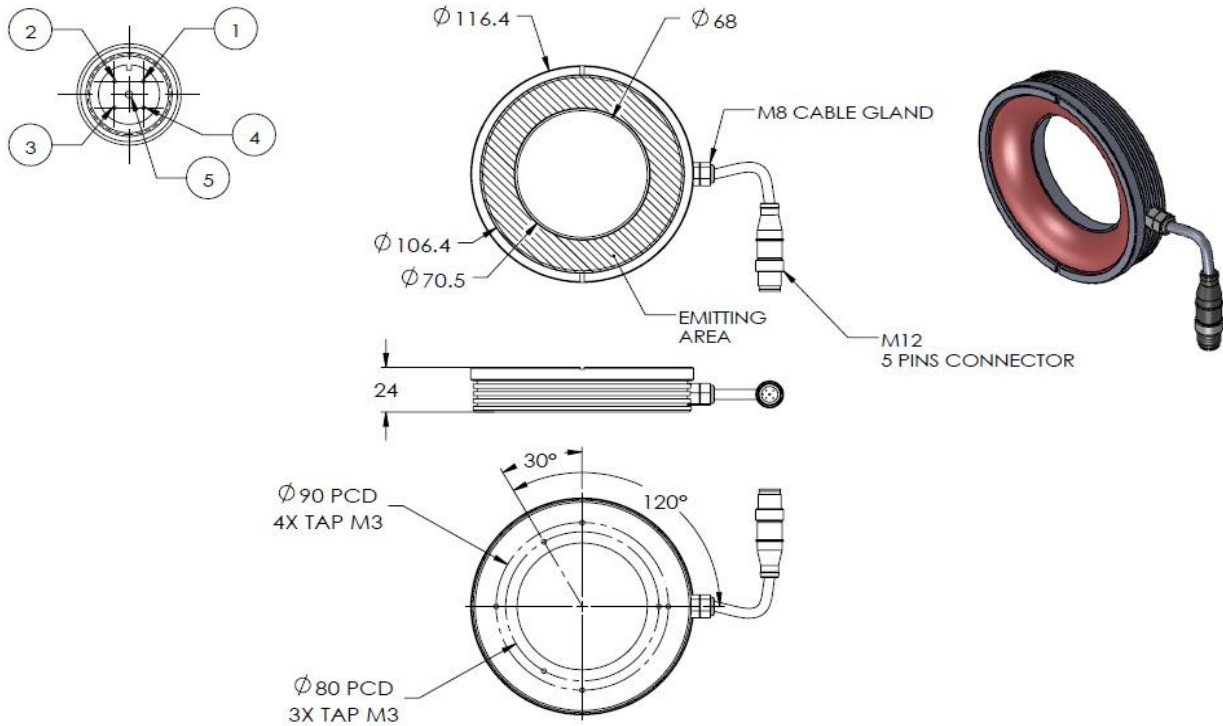

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	-
Outer Diameter	116.4
Inner Diameter	68
Thickness	24



## HPDP-00-110-1-B-24V

Optical Information				
Part Number		HPDP-00-110-1-B-24V		
LED Color		BLUE		
Wavelength	(nm)	470		
Intensity	(Lux)	10690	10230	8980
Working Distance	(mm)	30	40	50
Illumination (number of row)		1		
Illumination Active Area				
Active Inner Diameter	(mm)	70.5		
Active Outer Diameter	(mm)	106.4		
Emission angle	(deg.)	0		
Eye Safety Class		II		
Electrical Information				
Lighting Supply Voltage (constant voltage mode)		24V ± 2%		
Continuous Current	(mA)	182		
Power Consumption	(W)	4.37		
LED temperature, Operating after 60 minutes	°C	51.2		
Lighting casing temperature, Operating after 60 minutes	°C	-		
Strobe Mode Specification				
Pulse Operation		YES		
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC		
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	546		
Max. Trigger Pulse Duration	(msec)	10		
Duty Cycle		0-10%		
Additional Information				
Additional Cooling Method		Attached to machine part for better heat dissipation		
Life span in continuous mode		20,000 hours (drop to 50% intensity) at 25°C		
Life span in strobe mode		Est. >50,000 hours (drop to 50% intensity) at 25°C		
Intensity Controller Selection		ANG-Series, LC-Series, STB-Series		
CE Conformity		YES		
RoHS Compliance		YES		
Connection				
Connector Type (Default):		M12 5 PINS CONNECTOR (MALE)		
Cable Length out from lighting :	(mm)	500		
Pin Configuration :		Pin	Signal	Cable Color
		4	LED +	BLACK
		3	N.C.	---
		2	LED -	WHITE
				
Application				
Optimal Working Distance	(mm)	30 - 50		