




ILLUMINATOR DATA

LSW-15-070-3-W-24V


Lighting Dimension

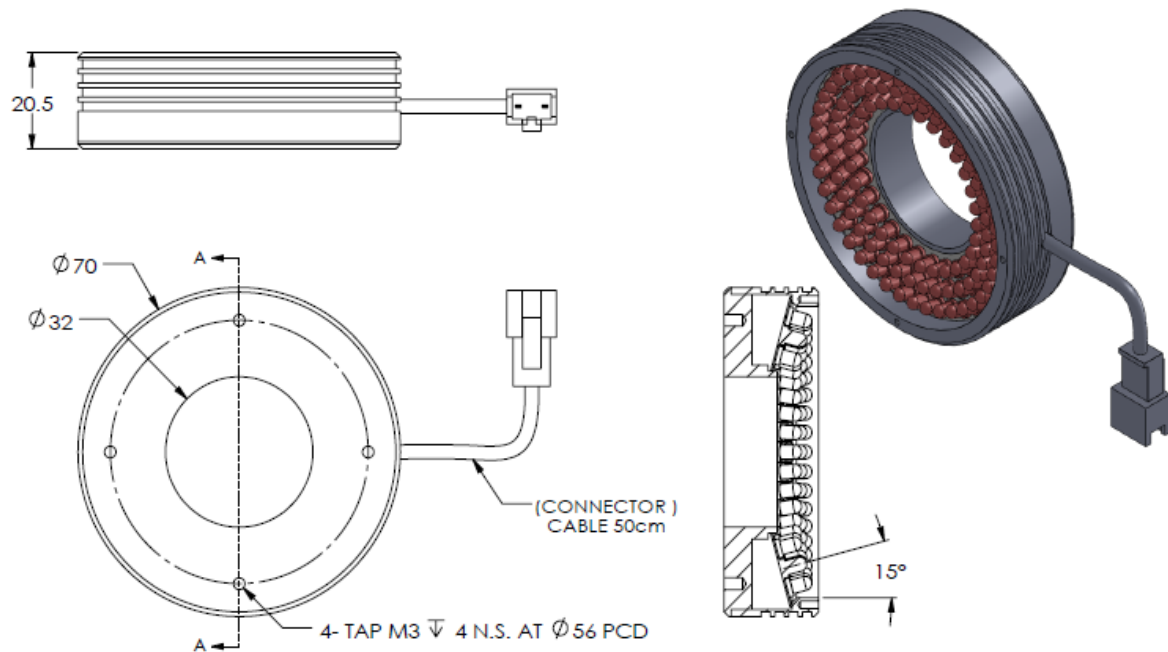

Mechanical Information	
Casing Material	Aluminium
Storage Temperature Range	Temp 0-45°C, Humidity 20-85%
Weight	-
Outer Diameter	70
Inner Diameter	32
Thickness	20.5



LSW-15-070-3-W-24V

Optical Information									
Part Number		LSW-15-070-3-W-24V							
LED Color		WHITE							
Wavelength	(nm)	*Refer to the Chromaticity Table below							
Intensity	(Lux)	62800			51000			42100	
Working Distance	(mm)	75			85			95	
Illumination (number of row)		3							
Illumination Active Area									
Active Inner Diameter	(mm)	37							
Active Outer Diameter	(mm)	67							
Emission angle	(deg.)	15							
Eye Safety Class		II							
*CHROMATICITY TABLE									
X	0.296	0.287	0.307	0.311	X	0.311	0.307	0.33	0.33
Y	0.276	0.295	0.315	0.294	Y	0.294	0.315	0.339	0.318
Electrical Information									
Lighting Supply Voltage (constant voltage mode)		24V ± 2%							
Continuous Current	(mA)	240							
Power Consumption	(W)	5.76							
Lighting casing temperature, after 60 minutes	Operating °C	76.1							
Strobe Mode Specification									
Pulse Operation		YES							
Max. Lighting Supply Voltage (Constant voltage power supply)	(V)	Pulsing at 24VDC to 48VDC, 0-10% Duty Cycle Recommended at 36VDC							
Pulse Current, (Max. 10msec) (Constant current power supply)	(mA)	720							
Max. Trigger Pulse Duration	(msec)	10							
Duty Cycle		0-10%							
Additional Information									
Additional Cooling Method		Attached to machine part for better heat dissipation							
Life span in continuous mode		20,000 hours (drop to 50% intensity) at 25°C							
Life span in strobe mode		Est. >50,000 hours (drop to 50% intensity) at 25°C							
Intensity Controller Selection		ANG-Series, LC-Series, STB-Series							
CE Conformity		YES							
RoHS Compliance		YES							
Connection									
Connector Type (Default):		JST SMR-03V							
Cable Length out from lighting :	(mm)	500							
Pin Configuration :		Pin	Signal			Cable Color			
		1	LED +			RED			
		2	N.C.			---			
		3	LED -			WHITE			
									
Application									
Optimal Working Distance	(mm)	75 - 95							